

### ELECTRICAL SAFETY INSTRUCTIONS

All connections must be installed by a licensed electrician, in accordance with current building codes. Consult a qualified electrician.


### IMPORTANT

Always switch off the electrical supply at the main during installation and maintenance. It is recommended that the circuit breaker is switched off for the necessary circuit before installation commences.

Fitting in Bathrooms is subject to the appropriate building code Regulations. This product is **NOT** suitable for outside zones. It is also **NOT** suitable for installation in saunas, steam rooms or shower cubicles. This product is only suitable for permanent installation. **DO NOT** connect to a trailing plug and socket outlet. This product is only suitable for indoor use. **DO NOT** attach the product to surfaces that are damp or otherwise electrically conductive.

### INSTALLATION CARE & SAFETY

Wear suitable eye protection when drilling. Take care when using power tools. Beware of hidden cables or pipes. Take care if drilling on tiled surfaces in case the drill slips. A piece of masking tape applied to the wall before marking out the fixing holes will stop the drill from wandering.

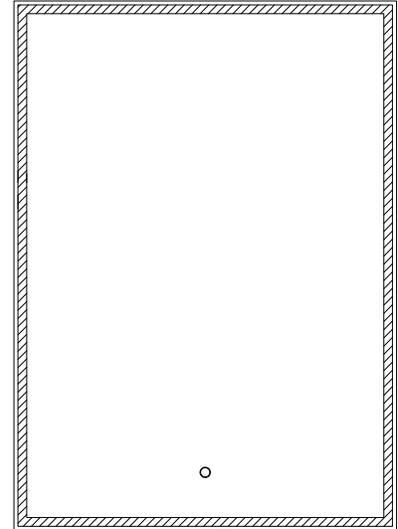

### IMPORTANT

**DO NOT** strike glass components with hard or pointed items. **DO NOT** place very hot or very cold items against or in close proximity to glass surfaces unless an adequately thick insulation material is used to prevent such items coming in contact with the glass. The nominal thickness of the mirror glass used in this product is 1/4" and is flm backed for safety. If the glass becomes chipped or broken replace immediately.

### CLEANING




It is recommended that the unit is cleaned with a soft, dry, non abrasive cloth when turned off. Never use cleaning agents or abrasive materials on any type of surface finish. **DO NOT** allow moisture to come into contact with the electrical components.



LTL HOME PRODUCTS, INC.

125 Rt. 61 Schuylkill Haven, PA 17972  
1-800-360-1585 • fax 570-385-5475 • info@ltlhomeproducts.com  
www.ltlhomeproducts.com

### Assembly instruction for recess installation

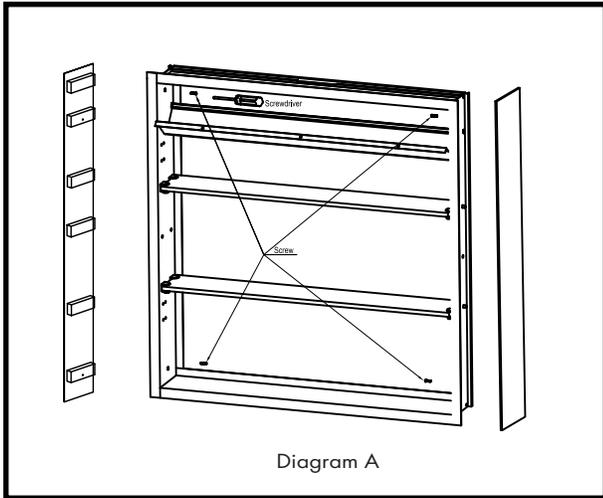


1. Remove the fixing screws of mirror sides for recess installation ( see diagram A )
2. Measure the length,width,depth of back of cabinet for recess ( see diagram B )
3. Fixing the screw after cabinet installed on proper position, put the decorating cap on after installed ( see diagram C )
4. Before making any electrical connections it is necessary to turn off the main electricity supply. This unit is provided with a supply cable already fitted. This cable should be fitted to the household lighting circuit or to a fused 3 AMP supply. Connections should be made in accordance with the latest regulations. This cabinet is manufactured to CLASS 1 and requires an earth connection.
5. When the cabinet is fully secure the internal top cover should be closed and secured with the small screws removed earlier. When the cover is closed and secure restore the mains power and test the function of the lights and the shaver socket. If the light fails to function properly it is likely the IR sensor has been positioned too close to an adjacent wall or reflective surface



#### OPERATING INSTRUCTIONS

Quick touching switch for light on/off , keep touching switch three seconds for dimming function .  
Quick clicking switch two times for light color changing 3000K / 4000K / 6000K .

6. Fitting the glass shelves. Firstly insert a shelf into the top two shelf support brackets then slide upwards so the grub screws on the underside of the support brackets (Screw C) can be sufficiently tightened to hold glass in place. Repeat for the bottom shelf (NOTE: be careful not to overtighten). Shelves can be positioned accordingly by sliding the supports up or down (NOTE: Take care to use both hands when sliding shelves and ensure that support brackets at both ends slide simultaneously).



7. If the doors are out of alignment first remove the soft-close buffer (from the relevant hinges) which clips into the main hinge plate. The soft-close hinges offer adjustment in 3 directions via adjustment screws E, F and G (see diagram).

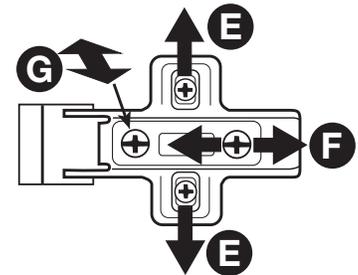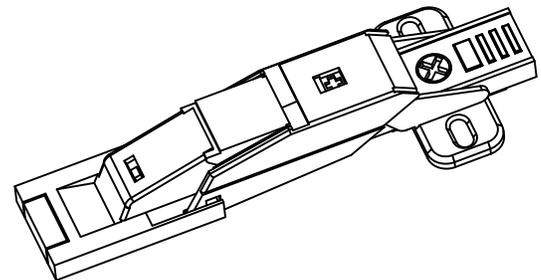

LTL HOME PRODUCTS, INC.


1-800-360-1585 • fax 570-385-5475

info@ltlhomeproducts.com

www.ltlhomeproducts.com

### Assembly instruction for wall mount installation

1. Insert the slideable brackets from the slot at top extrusion.
2. Fixing the screw after the top slideable brackets moved to proper position. ( see diagram D )
3. Fixing the screws of supporting bracket under the bottom of cabinet after cabinet fixed on proper position. ( See Diagram E )
4. Before making any electrical connections it is necessary to turn off the main electricity supply. This unit is provided with a supply cable already fitted. This cable should be fitted to the household lighting circuit or to a fused 3 AMP supply. Connections should be made according to the wiring diagram. This cabinet is manufactured to CLASS 1 and requires an earth connection.
5. When the cabinet is fully secure the internal top cover should be closed and secured with the small screws removed earlier. When the cover is closed and secure restore the mains power and test the function of the lights and the shaver socket. If the light fails to function properly it is likely the IR sensor has been positioned too close to an adjacent wall or reflective surface

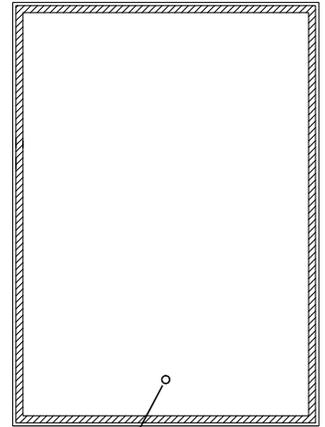


Touch Sensor


#### OPERATING INSTRUCTIONS

Quick touching switch for light on/off , keep touching switch three seconds for dimming function .  
Quick clicking switch two times for light color changing 3000K / 4000K / 6000K .  
Touch sensor also control the on/off for the 6000K LED light inside the cabinet.

( Diagram D )

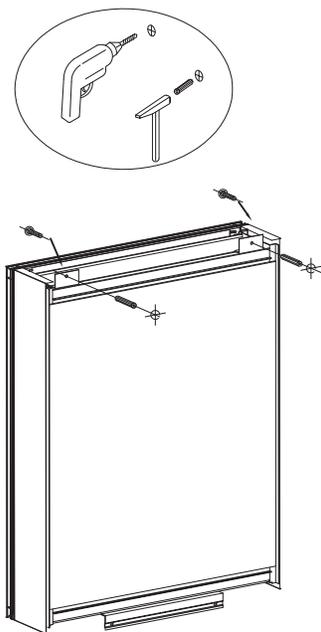

( Diagram E )

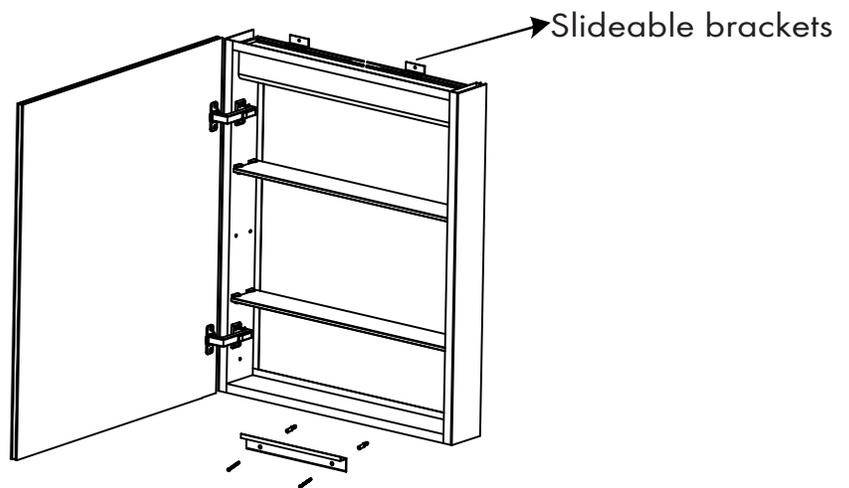


**LTL HOME PRODUCTS, INC.**

1-800-360-1585 • fax 570-385-5475

info@ltlhomeproducts.com

www.ltlhomeproducts.com


**Installation Instructions:**

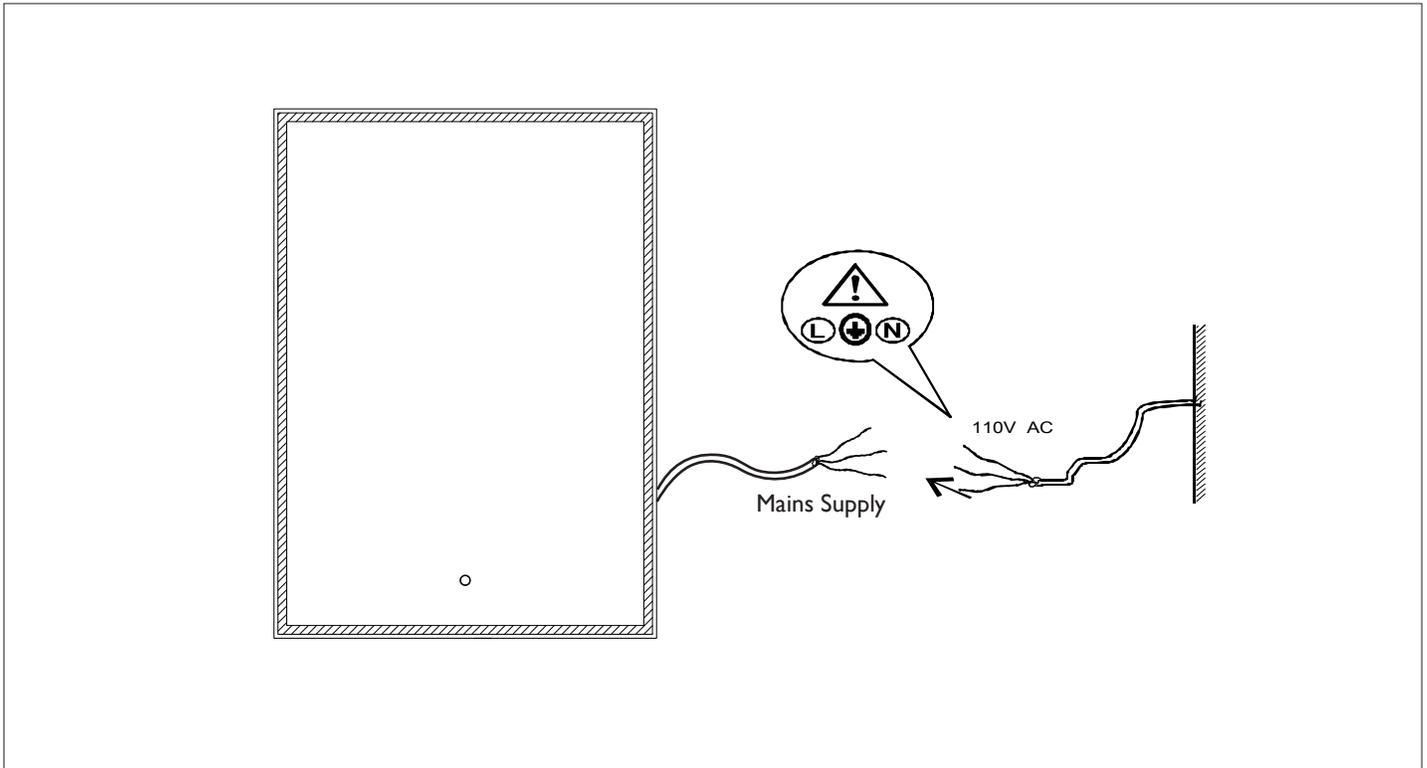

The next step is to make the electrical connection from the mirror to the mains supply. Use the connection wire found at the rear of the mirror to make the necessary connections. A second person will need to hold the mirror in place whilst electrical connections are made.

**⚠ Electric Outlet:** This outlet only suitable for those appliances with low power such as shaver or electric toothbrush, the maximum watts of this outlet is 500W.

THIS PRODUCT IS MANUFACTURED TO CLASS I CATEGORY AND MUST HAVE AN EARTH CONNECTION.

<p><b>COLOUR CODING:</b>  <b>L - Live = Black</b>  <b>N - Neutral = White</b>  <b>⊕ - Earth = Green</b></p>	<p>Strip wires to a suitable length. <b>DO NOT</b> connect to a plug &amp; socket outlet.</p> 
---	---

**! IF IN DOUBT CONSULT YOUR ELECTRICIAN !**



**LTL HOME PRODUCTS, INC.**

125 Rt. 61 Schuylkill Haven, PA 17972  
 1-800-360-1585 • fax 570-385-5475 • info@ltlhomeproducts.com  
 www.ltlhomeproducts.com